
IT Series Friction Feeders



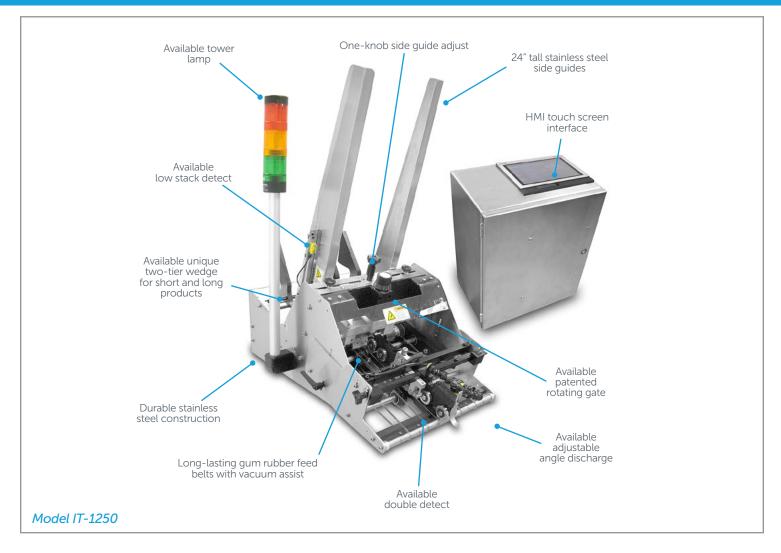

Streamfeeder's IT Series Friction Feeders easily integrate to a variety of host and control systems such as cartoners, case erectors, wrappers, WMS and more. Feed a wide variety of flat and multi-thickness products. Operates on-demand, one at a time or batched sets, and continuous feed mode.

Wi-Fi enabled controls allow you to set-up and adjust these feeders on-the-fly from an application on your phone, tablet or laptop. Management, operators, and maintenance can view real-time diagnostics and reports allowing them to track productivity, quality and efficiencies.

IT Series Friction Feeders



Standard Features

- HMI touch screen
- I/O interface
- Job library
- Maintenance schedules
 Real time data display with alerts
- Miss-detect
- Photo-sensor trigger
- Programmable job size
- - Report output
- Rubber feed belts
- Timeout stop
- Trigger delay
- Vacuum assist

Optional Features

- Adjustable discharge
- Double sheet detect
- Low stack detect
- Powered rotating gate
- Small product configuration
- Speed matching
- Tower lamp

- Self-triggering

Vacuum transport

Vertical discharge

Applications

- Batch Counting
- Cartoners
- Case Packers
- Collators

- Envelope Inserters
- Flow Wrappers
- Order Fulfillment
- Poly Baggers
- Shrink Wrappers
- Vertical Baggers

Products

- Booklets
- Brochures
- Cardstock
- Collapsed cartons
- Envelopes
- Folded documents
- Product inserts
- Sheet paper





Contact our experienced sales team today for a comprehensive review of your application/product and see how our IT Series Friction Feeders can benefit your company.

Specifications for all Models

Batch Size

1-9,999

Belt Speed

7,000 in/min (178 m/min)

Min/Max Product Thickness

.003" to 1.0" (.076 to 25.4 mm)*

Utilities

115/230vac, 50/60 Hz, 12/6A configured)

Warranty

One year limited

Maximum Product Size

IT-600

Standard: 6" wide x 9" long (152 x 229 mm)* Small Product Feeder: 5 W x 5 L in (127 x 127 mm)*

IT-1250

12" wide x 14" long (305 x 357 mm)*

18" wide x 14" long (457 x 357 mm)*

24" wide x 14" long (609 x 357 mm)*

Minimum Product Size

IT-600

Standard: 2" wide x 2.5" long (51 x 64 mm)* Small Product Feeder: 1 W x 1 L in (25.4 x

IT-1250

2" wide x 2.5" long (51 x 64 mm)*

IT-1800

8" wide x 2.5" long (203 x 64 mm)*

IT-2400

4" wide x 2.5" long (101.6 x 64 mm)*

Weight

IT-600

Feeder: 45 lbs. (20.4 kg); Control Box: 36 lbs. (16.3 kg)

IT-1250 & IT-1800

Feeder: 50 lbs. (23 kg); Control Box: 36 lbs. (16.3 kg)

Feeder: 60 lbs. (27.2 kg); Control Box: 36 lbs. (16.3 kg)

*Other sizes and thicknesses available.



+1 (763) 502-0000 Streamfeeder.com