Shingling Conveyor

Overview

Streamfeeder's Shingling Conveyor provides flexibility and versatility wherever product collection is required. The slow-moving design allows collection of products in a shingled manner and the amount of shingle can be controlled by the variable speed control. The high-torque drive system is designed to handle large work-loads ensuring years of dependable operation.

Optional batch counting capabilities can be added to eliminate manual counting of products.

Standard Features

- Powder coated steel frame for durability
- Variable speed control for shingling control
- Long lasting, durable belt (choose from a single 10" wide belt or two 3" wide adjustable belts)
- End plate with cut-out for easy and safe removal of collected product
- Casters for portability
- Non-skid levelers for variable height adjustment
- Inline or 90-degree interface to accommodate available floor space

Applications

- Addressing
- Attaching
- Coding
- Date Stamping
- Labeling


- Printing
- Scanning
- Tabbing
- Tip-On/Affixing
- Verification

Products

- Backer Board
- Booklets
- Brochures
- Cardstock
- Collapsed Cartons
- Envelopes

- Folded Documents
- Folders
- Manuals
- Post Cards
- Sheet Paper

Contact our experienced sales team today for a comprehensive review of your application/product and see how our Shingling Conveyor can benefit your company.

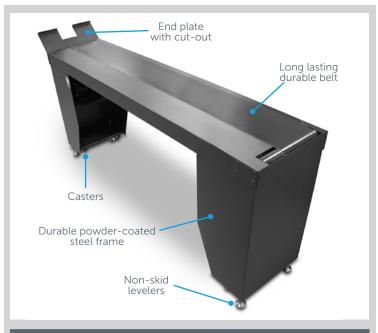

Specifications

Maximum Product Size

12" wide x 12" long (305 x 305 mm)

Minimum Product Size

4" wide x 4" long (102 x 102 mm)

Speed

Variable, 63 feet/minute (19.3m/min)

Utilities

115vac, 60Hz, 5A

Discharge Height

29.5-33.5" (75-85 cm)

Dimensions

72" long x 15.5" wide (183 x 39 cm)

Warranty

One year limited

Other sizes and thickness capabilities available.

Hayssen | Rose Forgrove | Sandiacre | Schib | Simionato | Streamfeeder | Symach | Thiele

Streamfeeder - RW Flevible Systems

